



MUFFLE FURNACE



Details

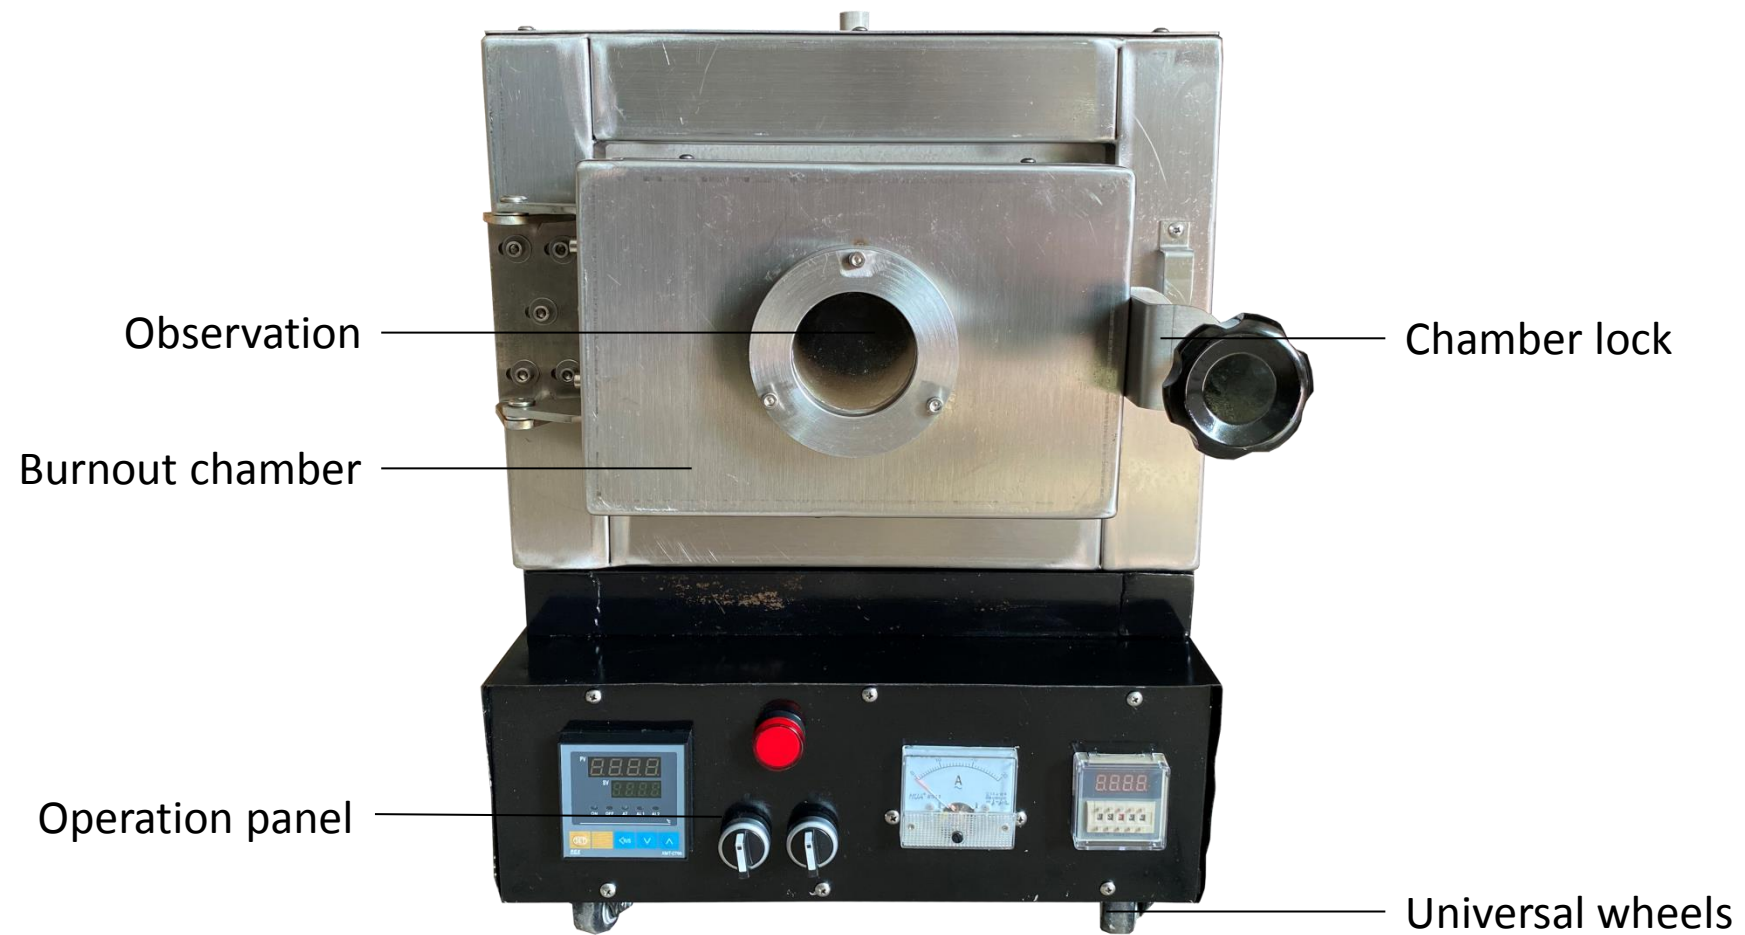

Operation panel

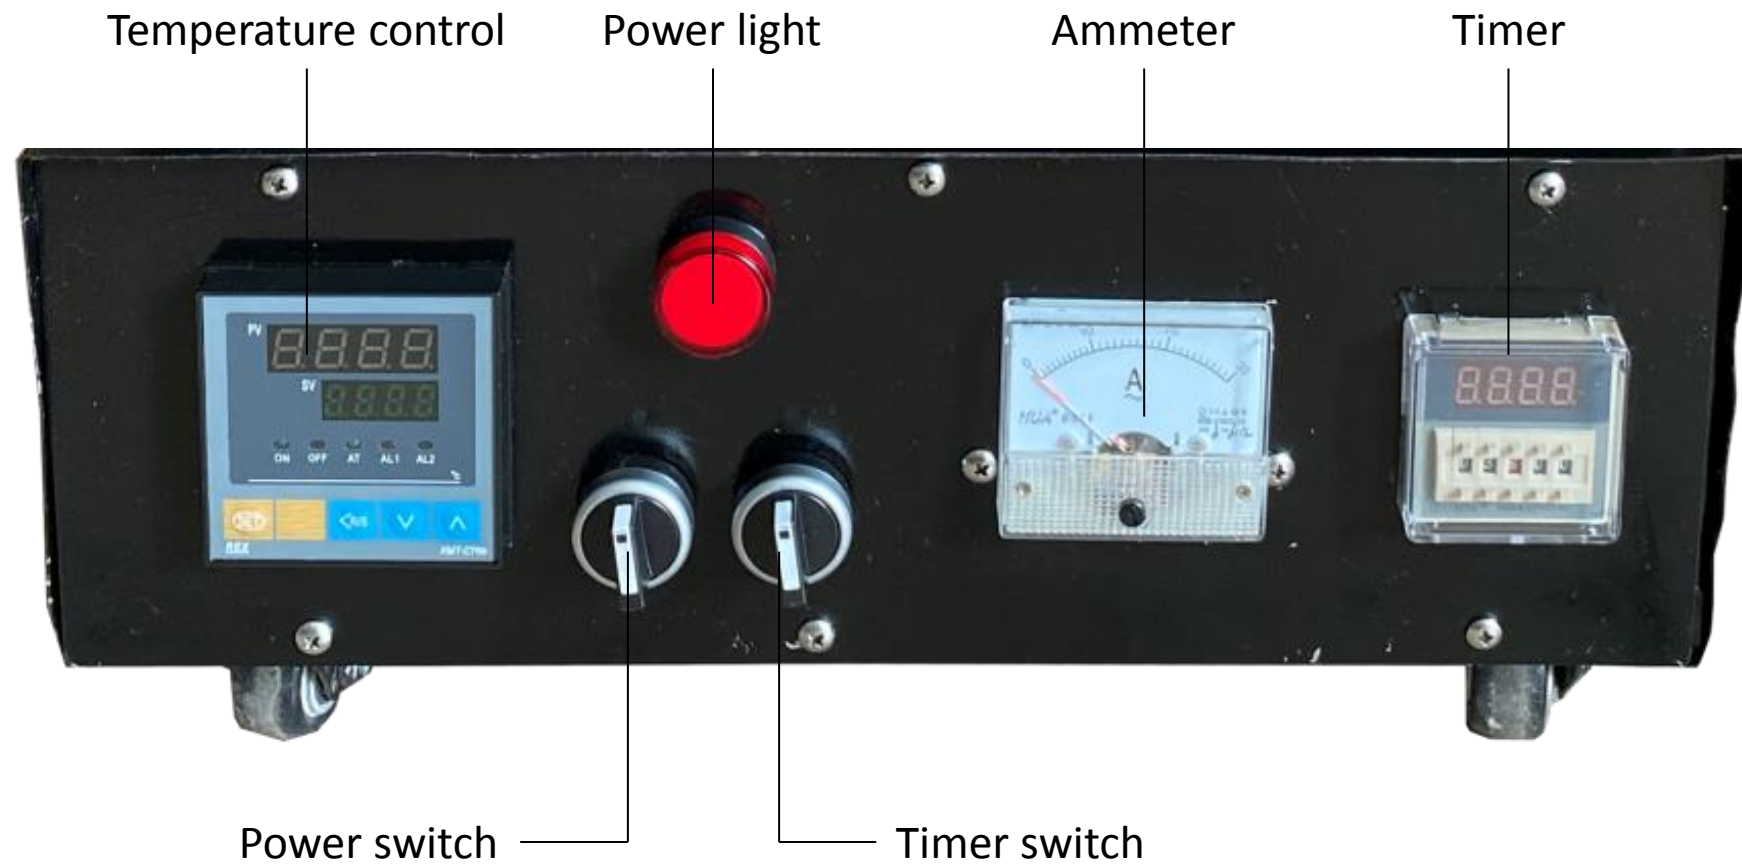

Parameter

Model number	CDO-MF4	CDO-MF8	CDO-MF10	CDO-MF12	CDO-MF15	CDO-MF20
Voltage	Three phase 380V±10%, 50/60Hz					
Power	4kw	8kw	10kw	12kw	15kw	20kw
Weight	About 150kg					
Inside dimensions	300*200*120 mm	400*250*160 mm	400*250*200 mm	500*300*200 mm	600*400*300 mm	600*400*400 mm
Maximum temperature	1200°C	1200°C	1200°C	1200°C	1200°C	1200°C
Furnace chamber material	High temperature resistant burnt gems					
Heating zone	4side synchronous heating					

Feature

- (1) Comes with Fashionable appearance design.
- (2) Muffle furnace adopt special ceramic fiber material, the heating speed is fast and the heat preservation effect is good.
- (3) Heating elements: 1000 °C, 1200 °C electric furnace wire, 1300 °C, 1400 °C silicon carbide rod, 1600 °C, 1700 °C silicon molybdenum rod.
- (4) Comes with Temperature control system: thyristor control, PID parameters self-tuning function, with compensation and correction function.
- (5) Design with Safety factor: password lock function, safe and reliable.